

Tier1

BloombergNEF



ISO 9001 ISO 14001 SA 8000  
ISO 45001 OHSAS 18001



# M12 TOPCON MONO


SPDGxxx-N132M12

675~705W

- Double glass
- Silver frame
- Black frame
- Full black

25 Yr quality guarantee | 30 Yr power warranty

■ SUNPRO TOPCon module (Additional value from 30-year warranty)  
 ■ Common module

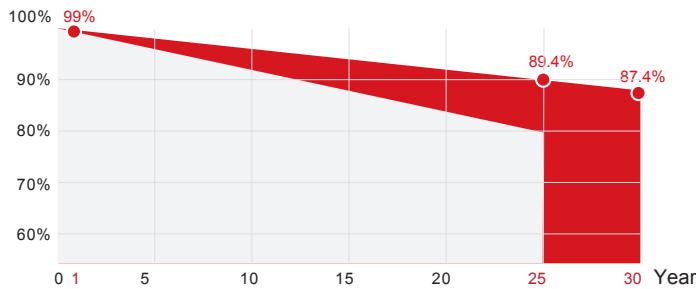

\*SUNPRO Standard tiered warranty



### WARRANTY & GUARANTEE

Linear output power guarantee  
25 years: 89.4% power output  
30 years: 87.4% power output



### WITHSTAND STRONG

Snow load 5400Pa  
Wind load 2400Pa



### PID RESISTANCE

Power positive tolerance:  
0~+3%.  
The attenuation probability of PID phenomenon is minimized through battery production technology optimization and material control



### R&D AND PRODUCTION

Advanced production line. Bifaciality>80%, effectively improves backside power generation. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



### HIGH EFFICIENCY

N-type, Components have better reliability and lower LID/LETID attenuation. Efficiency can reach 22.7%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.

## Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m<sup>2</sup>, Cells Temperature 25°C)

### Typical type

	675W	680W	685W	690W	695W	700W	705W
Max power(Pmax)	675	680	685	690	695	700	705
Max power voltage(Vmp)	39.0	39.2	39.4	39.6	39.8	40.0	40.2
Max power current(Imp)	17.31	17.35	17.39	17.43	17.47	17.51	17.55
Open circuit voltage(Voc)	46.9	47.1	47.3	47.5	47.7	47.9	48.1
Short circuit current(Isc)	18.24	18.29	18.34	18.39	18.44	18.49	18.54
Module Efficiency(%)	21.7	21.9	22.1	22.2	22.4	22.5	22.7
Max system voltage	DC 1500V / 1000V (IEC)						
Maximum Series Fuse Rating	35A						

### Electrical Characteristics with 20% Rear Side Power Gain


Front power Pmax/W	675W	680W	685W	690W	695W	700W	705W
Total power Pmax/W	810	816	822	828	834	840	846
Vmp/V(Total)	39.0	39.2	39.4	39.6	39.8	40.0	40.2
Imp/A(Total)	20.77	20.82	20.87	20.92	20.96	21.01	21.06
Voc/V(Total)	46.9	47.1	47.3	47.5	47.7	47.9	48.1
Isc/A(Total)	21.89	21.95	22.01	22.07	22.13	22.19	22.25

### Electrical parameters at NMOT test conditions

(Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Typical type	675W	680W	685W	690W	695W	700W	705W
Max power(Pmax)	510	514	518	522	526	529	533
Max power voltage(Vmp)	36.9	37.1	37.2	37.4	37.6	37.8	38.0
Max power current(Imp)	13.84	13.88	13.91	13.94	13.97	14.00	14.03
Open circuit voltage(Voc)	44.4	44.6	44.8	45.0	45.2	45.4	45.5
Short circuit current(Isc)	14.71	14.75	14.79	14.83	14.87	14.91	14.95

### DIMENSIONS AND STRUCTURE

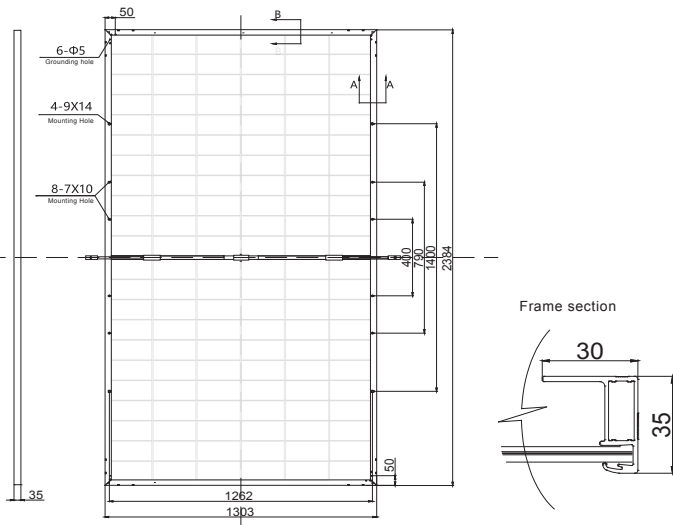

### Mechanical Data

Dimensions	2384x1303x35mm
Weight	37.8kg
Glass	(F) 2.0mm ultra clear embossed double layer colorless glass (B) 2.0mm semi-tempered glass
Output cables	4mm <sup>2</sup> , symmetrical lengths 1300mm
Connectors	MC4 compatible IP68
Cell type	N type Mono-Crystalline, 210x105mm
Number of cells	132cells ( Half-Cell )

### Temperature Characteristics

### Packing Configuration

Temp.Coeff.of Isc(TK Isc)	0.05%/°C	Container	40'HQ
Temp.Coeff.of Voc(TK Voc)	-0.25%/°C	Pieces per pallet	31
Temp.Coeff.of Pmax(TK Pmax)	-0.29%/°C	Pallets per container	18
Operating temperature	-40~+85°C	Pieces per container	558
Normal operating cell temperature	41±3°C		

### Tests, Certifications and Warranties

System certs	ISO 9001, ISO14001, ISO45001
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+10W
Junction box	IP 68
Warranties	15 years product warranty and 30 years 87.4% of power

### I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

