
HD HYUNDAI SOLAR MODULE

NF(BK) Series

Premium N-Type TOPCon Module

HiS-T430NF(BK) | HiS-T435NF(BK) | HiS-T440NF(BK)

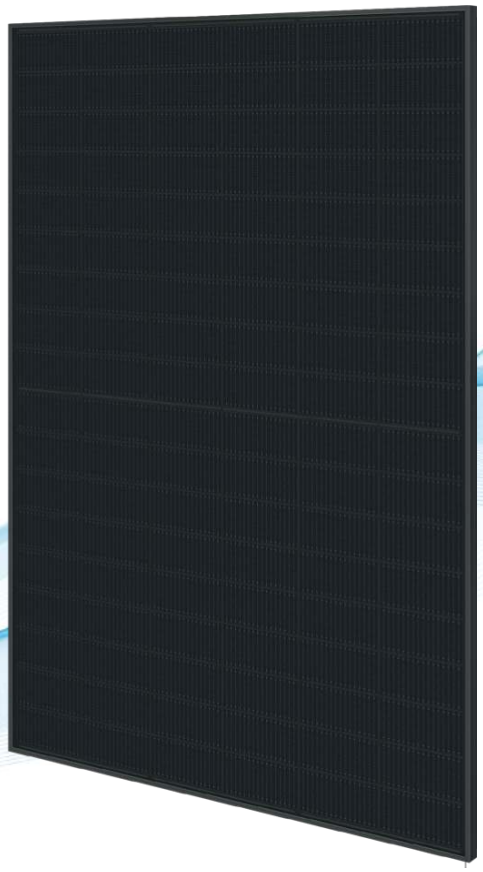

22.53%
22.53%
High Efficiency

TOPCon
High-End
TOPCon
Technology

Higher
Bifaciality


Long-Term
Reliability

For Residential
(Full Black Design)

HD Hyundai's Warranty Provisions

25 YEARS
- 25-Year Product Warranty
  - Materials and workmanship

30 YEARS
- 30-Year Performance Warranty
  - First year degradation: 1%
  - Linear warranty after initial year: with 0.4%p annual degradation, 87.4% is guaranteed up to 30years

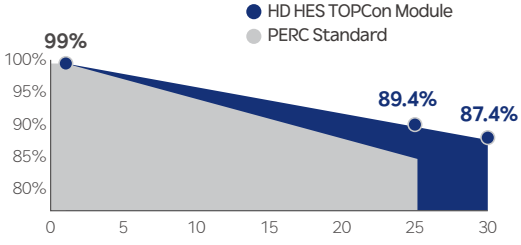

*Refer to HD HES standard warranty for details.

Certification

US LISTED
E325005

- UL 61215 / UL 61730 / IEC 61215 / IEC 61730 Certified
- ISO 9001 : Quality management systems
- ISO 14001 : Environmental management systems
- ISO 45001 : Occupational health and safety management systems

Electrical Characteristics

HiS-TxxxNF(BK)		HiS-T430NF(BK)		HiS-T435NF(BK)		HiS-T440NF(BK)	
Item	Unit		BNPI		BNPI		BNPI
Nominal output (Pmax)	W	430	477	435	482	440	487
Open circuit voltage (Voc)	V	39.49	39.64	39.69	39.84	39.90	40.05
Short circuit current (Isc)	A	13.83	15.32	13.91	15.41	14.06	15.58
Voltage at Pmax (Vmpp)	V	32.51	32.70	32.74	32.87	32.82	32.95
Current at Pmax (Impp)	A	13.23	14.59	13.29	14.67	13.41	14.79
Module efficiency	%	22.02		22.28		22.53	
Power Class Sorting	W	0 ~ +5					
Temperature coefficient of Pmax	%/K	-0.290					
Temperature coefficient of Voc	%/K	-0.250					
Temperature coefficient of Isc	%/K	0.043					
Bifaciality	%	80±5					

*STC : Irradiance 1,000 W/m², cell temperature 25℃, AM=1.5 / Test uncertainty for Pmax ±3%; Isc; Voc ±5%
**The electrical properties of BNPI are measured under the irradiance corresponding to 1000 W/m² on the module front and 135 W/m² on the module rear.

Additional Power Gain from rear side					
Pmpp gain	Pmpp[W]	Vmpp[V]	Impp[A]	Voc[V]	Isc[A]
5%	462	32.82	14.08	39.90	14.77
15%	506	32.82	15.42	39.90	16.17
25%	550	32.82	16.76	39.90	17.58

*Electrical characteristics with different rear power gain (reference to 440W)

Mechanical Characteristics

Dimensions	1,722mm (L) x 1,134mm (W) x 30mm (H) (67.8in x 44.6in x 1.2in)
Weight	24.3 kg (53.57 lbs)
Solar Cells	N-Type TOPCon, 108 (6x18) monocrystalline 16BB half-cut bifacial cells
Output Cables	Cable : (+)1,200mm(47.2in), (-)1,200mm(47.2in) / Customized length available Connector : Stäubli MC4 genuine Connector / IP68
Junction Box	3-part, 3 bypass diodes, IP68 rated
Construction	Front : 2.0mm(0.08in) semi-tempered solar glass with high transmittance and anti-reflective coating Rear : 2.0mm(0.08in) semi-tempered solar glass
Frame	Anodized aluminum alloy

Shipping Configurations


Container Size (HC)	40'	Modules Per Pallet (pcs)	36
Pallets Per Container	22	Modules Per Container (pcs)	792

Installation Safety Guide


- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not handle or install modules when they are wet.


Nominal Module Operation Temperature	41℃ ± 2℃
Operating Temperature	-40℃~+85℃
Maximum System Voltage	DC 1,500 V
Maximum Reverse Current	30A
Maximum Test Load	Front 5,400Pa Rear 4,500Pa
Fire Performance	Type 29

Module Diagram (unit : mm)

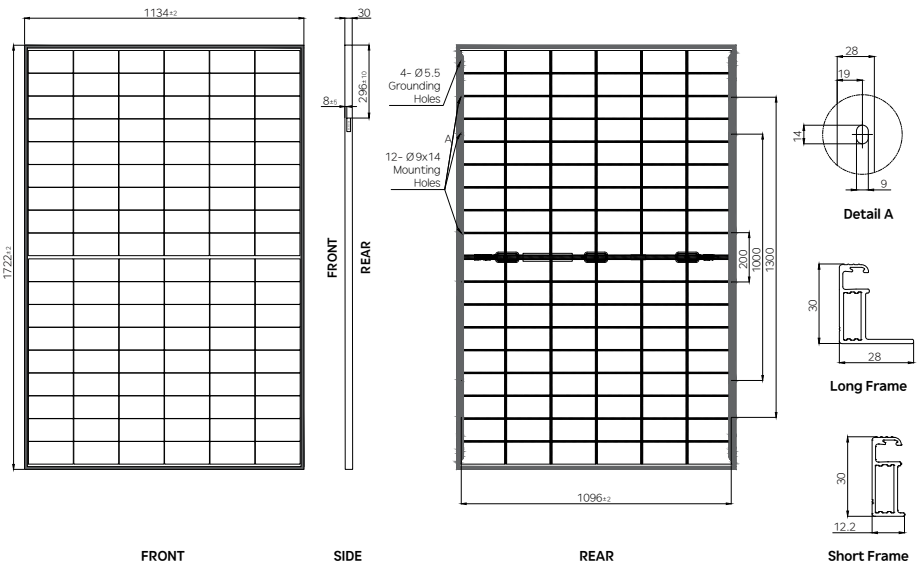

I-V Curves (HiS-T440NF(BK))

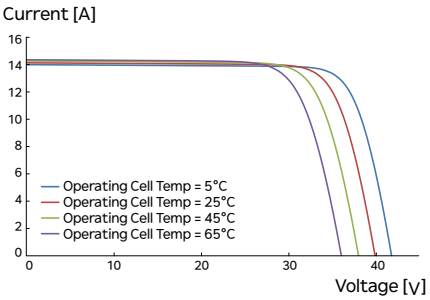

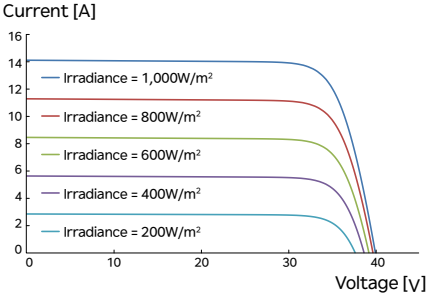

Sales & Marketing
hes.sales@hd.com

HD Hyundai Energy Solutions reserves the right to update or modify the specifications and features listed in this datasheet without prior notice. Always check the latest version of the datasheet for accurate information. Before using the product, please refer to the Installation and Operation Manual and Warranty. We retain the right of final interpretation.

HD HYUNDAI ENERGY SOLUTIONS